Outdoor Cabinet SCA-80kWh-30-II



INTRODUCTION

SCA-80kWh-30-II Outdoor Cabinet, with standard configuration of 30 kW/80 kWh, is composed of battery and electrical cabinet. It can apply to demand regulation and peak shifting and C & I energy storage, etc. Split design concept allows flexible installation and maintenance, modular design concept is easy to integrate and extend. The battery cabinet matches various mainstream PCS.

FEATURES

- High charge/discharge efficiency
- Advanced thermal management system
- LiFePO4 battery compatible with reliability and energy density
- Modular design, quick delivery
- Small footprint, flexible installation, easy maintenance, expansion to MW-level system

APPLICATION









small-scale renewable energy power generation


user-side response


integrated energy management for C&I park




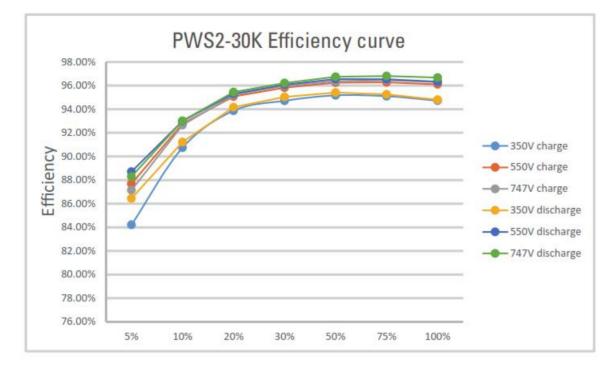


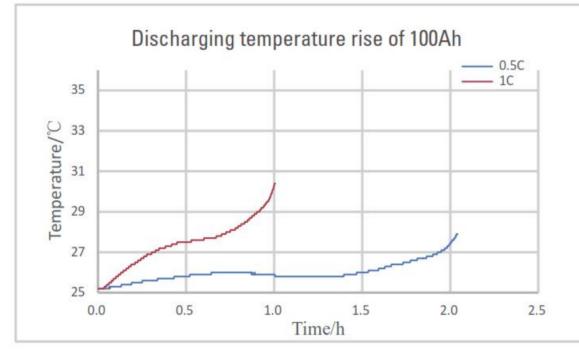

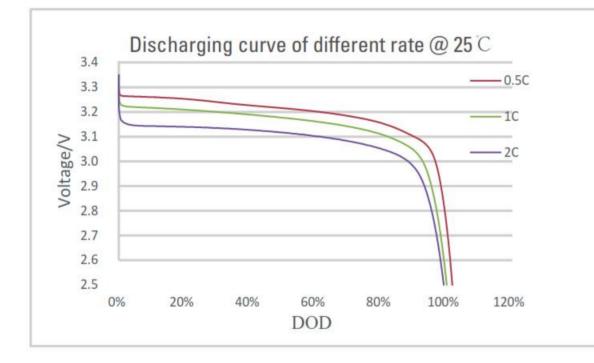

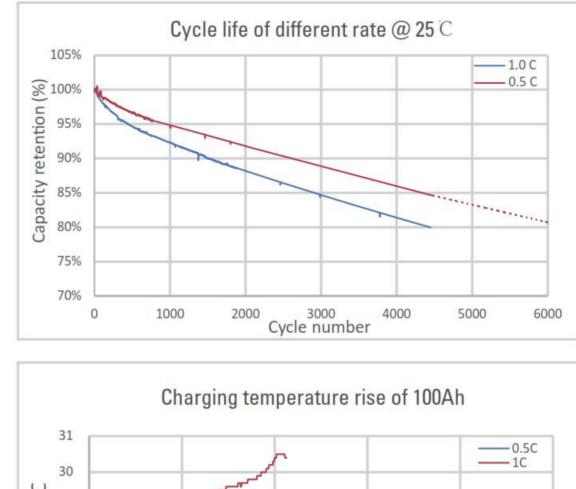

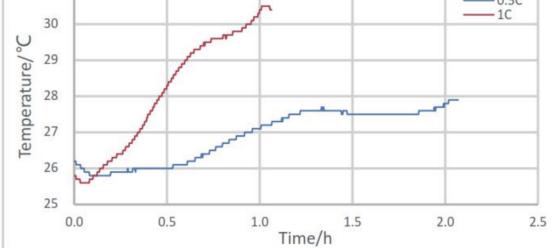

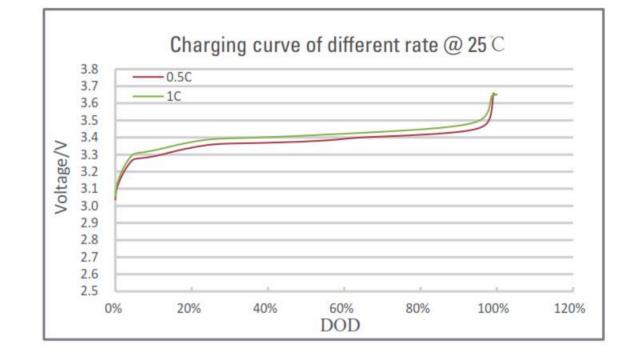

SPECIFICATIONS

Product Introduction	
Rated power	30 kW
AC Voltage	480 V
Frequency	60 Hz
Pack	2P16S (200 Ah)
Pack number	8
Dimensions (W*D*H)	2300mm×1000mm×1200mm
Protection level	IP55
DC Voltage Range	358.4V-460.8V
Capacity	81.92kWh (Max)
Integrated Controls	RS485/CAN/Ethernet
Compliance	UL9540,UL1973,UL1741,UN38.3
Battery chemistry	LFP
MAX Efficiency	88%

MAX Enterency	0070
Ambient temperature	-30 °C to 50 °C
System topology	AC couple

American market sales and service partner:Atlantic Clean Energy Supply (ACES)Tel: 888-900-1581Website: www.atlanticces.comContact: sales@atlanticces.com

